


BAYONET TYPE THERMOCOUPLES

"Plastic Industry" Thermocouples

HOW TO ORDER:

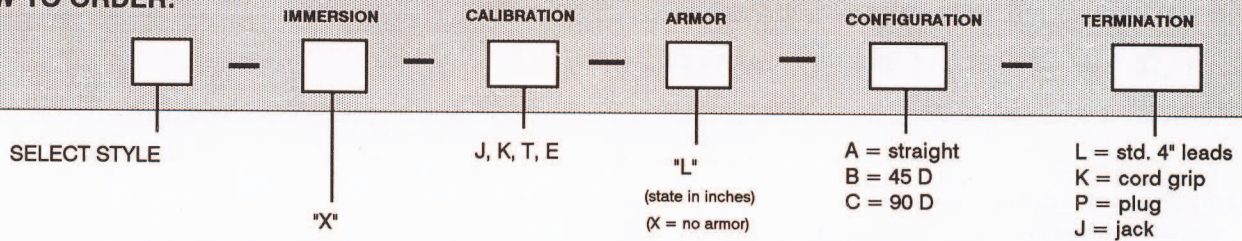

BAYONET (FIXED TYPE) STYLE PBT

45° ANGLE

90° ANGLE

COMPRESSION TYPE (ADJUSTABLE) STYLE PCT

45° ANGLE

90° ANGLE

CONNECT MOUNT (FIXED) STYLE PFT

- * 45 OR 90 DEGREE ANGLE AVAILABLE
- * DUAL CONSTRUCTION AVAILABLE. SPECIFY DUAL CALIBRATION
- * AVAILABLE OPTIONAL MATING CONNECTOR
- * STANDARD GROUNDED JUNCTION, FOR UNGROUNDED CONSULT FACTORY

FLEX ARMORED (ADJUSTABLE) STYLE PAT

- * STD TIP LENGTH 1/2" (O.D. = .188")
- * BAYONET CAP ADJUSTABLE OVER FLEXIBLE ARMOR
- * ADJUSTABLE TO ANY IMMERSION DEPTH
- * DESIGNATE "L" DIMENSION AND TERMINATION
- * STD ARMOR SIZE IS 3/16" ID X 9/32" O.D.

PIPE CLAMP ADAPTOR

"D" CLAMP BAND DIA.

A = 1 1/16" TO 1 1/4"
B = 1 1/4" TO 2 1/4"
C = 2 1/4" TO 3 1/4"
D = 3 1/4" TO 4 1/4"
E = 4 1/4" TO 5"
F = 5" TO 6"
G = 6" TO 7"

"L" BAYONET ADAPTOR LENGTH

1 = 1" (USE WITH THERMOCOUPLE THAT HAS "X" DIMENSION = 2")
2 = 2" (USE WITH THERMOCOUPLE THAT HAS "X" DIMENSION = 3")
3 = OTHER (SPECIFY).

TO ORDER:

PCA — [] — []

PART NO.	LENGTH	
	1/8" NPT	
MA - 1		7/8"
MA - 2		1 1/2"
MA - 3		2 1/2"
MA - 4		3 1/2"
For 3/8" -24 threads	MA - 5	7/8"
	MA - 6	1 1/2"
	MA - 7	2 1/2"
	MA - 8	3 1/2"